


ROLLER CHAINS

According to ČZ Standard

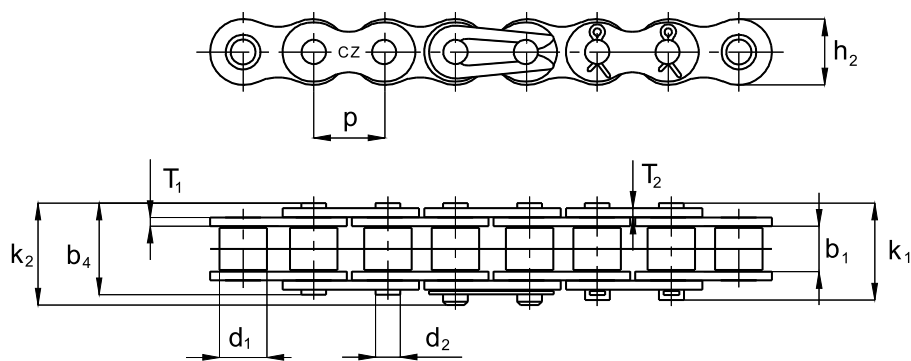

ISO ČSN	TRADE MARK ČZ	PITCH	INSIDE WIDTH	ROLLER DIAMETER	PIN DIAMETER	PIN LENGTH	CONNECT.		INNER PLATE WIDTH	INNER PLATE THICKNESS	OUTER PLATE THICKNESS	BEARING AREA	WEIGHT	BREAKING LOAD	CONNECTING ELEMENTS						
							PIN LENGTH	PIN LENGTH							B	A	E	S	L	LP	C
		p	b1 min.	d1 max.	d2 max.	b4 max.	k1 max.	k2 max.	h2 max.	T1	T2	S	q	FB min.							
		mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm ²	kg/m	N							
06 A	3/8"x3,9*	9,525	3,94	6,35	3,28	10,60		12,05	8,20	1,20	1,00	21,97	0,35	9 345	•	•	•				
	06 B STRONG*	9,525	5,72	6,35	3,28	13,35		14,70	8,20	1,50	1,20	29,25	0,72	14 300	•	•	•		•		•
	1/2"x3/16" VELO	12,7	4,88	7,75	3,66	11,20		12,30	9,90	1,00	1,00	26,53	0,35	8 400	•	•	•		•	•	•
	1/2"x3/16" V.T.	12,7	4,88	7,75	4,18	13,00		14,30	10,90	1,40	1,40	33,86	0,48	10 500	•	•	•		•		•
	1/2"x3/16" MOFA	12,7	4,88	7,75	4,18	13,00		14,30	10,90	1,40	1,40	33,86	0,48	15 750	•	•	•		•		•
086	1/2"x5,2	12,7	5,30	8,51	4,45	13,90		15,90	11,80	1,60	1,40	39,38	0,62	18 690	•	•	•		•		•
	1/2"x1/4" MOFA	12,7	6,40	7,75	4,18	14,50		15,90	10,90	1,40	1,40	40,13	0,52	15 750	•	•	•		•		•
	12 B STRONG**	19,05	11,68	12,07	6,10	24,50	26,85	26,20	17,70	2,40	2,40	101,87	1,51	36 000	•	•	•	•	•		•
	1"x1/2"***	25,4	12,70	15,88	8,28	31,10		32,90	21,00	3,50	3,00	171,40	2,38	65 000	•	•	•		•		•
	1"x43/64" R24*	25,4	17,02	15,88	8,28	35,30	38,20	37,00	24,00	3,50	3,00	206,17	3,30	74 000	•	•	•	•			

* ONLY WITH STRAIGHT PLATES

** ALSO WITH STRAIGHT PLATES (THE WIDTH OF OUTER PLATE CORRESPONDS WITH THE WIDTH OF INNER PLATE - h2)

CONNECTING ELEMENTS

